

VELOUR TOUCHTM
COLLECTION



EXCLUSIVE OLON COLLECTION OF
2D ULTRA-MATTE SOLID COLOURS




Please contact your sales representative for additional information if required.


1.800.387.2319
www.olon.com

OLON 

DOOR MOULDINGS

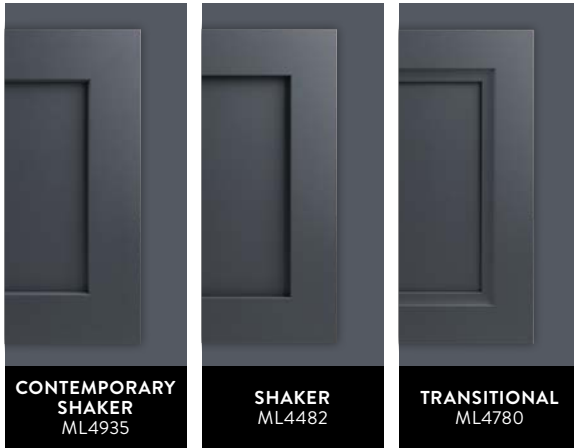

6 mm MDF PANELS FOR 5 PIECE DOOR ASSEMBLY

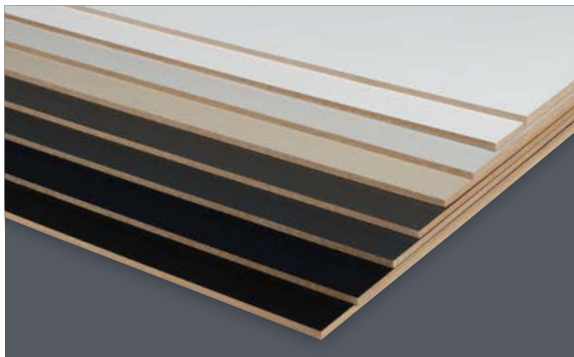

- Standard panel size is 4' x 8' for 6mm, 4' x 9' for 5/8" and 3/4"
- Sizes outside this matrix can be made available
- Thick panels such as 5/8" & 3/4" will come with a protective peel coat
- All panels are good 2 sides

PHYSICAL PROPERTY TEST RESULTS

	VelourTouch™
Surface Material Thickness	.010 mil
NEMA Ball Impact	850mm
Light Resistance	Slight Effect
NEMA Wear Resistance	100

ANSI/KCMA CHEMICAL RESISTANCE

Vinegar	No Effect
Lemon Juice	No Effect
Grape Juice	No Effect
Orange Juice	No Effect
Tomato Juice	No Effect
Coffee	No Effect
Olive Oil	No Effect
Alcohol 100 proof	No Effect
Detergent Solution	No Effect
Mustard	Moderate Effect

VelourTouch™ can be used for many different applications, please ensure that this products matches the specifications that you require for your building projects. VelourTouch™ is intended for vertical, light duty surfaces.

Please contact your sales representative for information on edgbanding if required.


VelourTouch™ and DecoLINK™ are trademarks of Olon Industries, Inc.

1.800.387.2319
www.olon.com

ACCESSORY MOULDINGS



5/8" & 3/4" PANELS FOR CASE GOODS AND FLAT PANEL DOORS

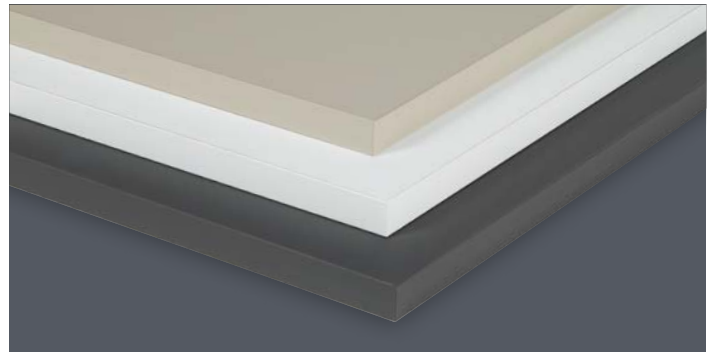

DECOLINK™ LAMINATE AVAILABLE



NEMA LD3 2000

	Total Cleaning Steps
Water	0
Ethanol	0
Acetone	0
Ammonia	0
Citric Acid	0
Vegetable Oil	0
Coffee	0
Tea	2
Ketchup	0
Mustard	5
Iodine	5
Permanent Marker	3
Pencil	2
Wax Crayon	3
Black Paste Shoe Polish	5
NEMA CLEANABILITY SCORE	25

**Above values are to be considered average indicatives. Results may vary depending on colour.

OLON

VTBR/0720